


Truck-Mounted Concrete Pump


BSF 36-4

Output up to 95 m³/h

Delivery pressure up to 82 bar

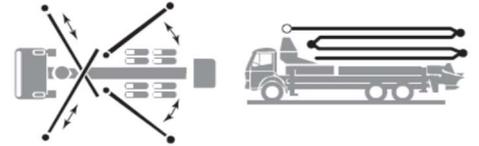

ergonomic[®]
inside 3

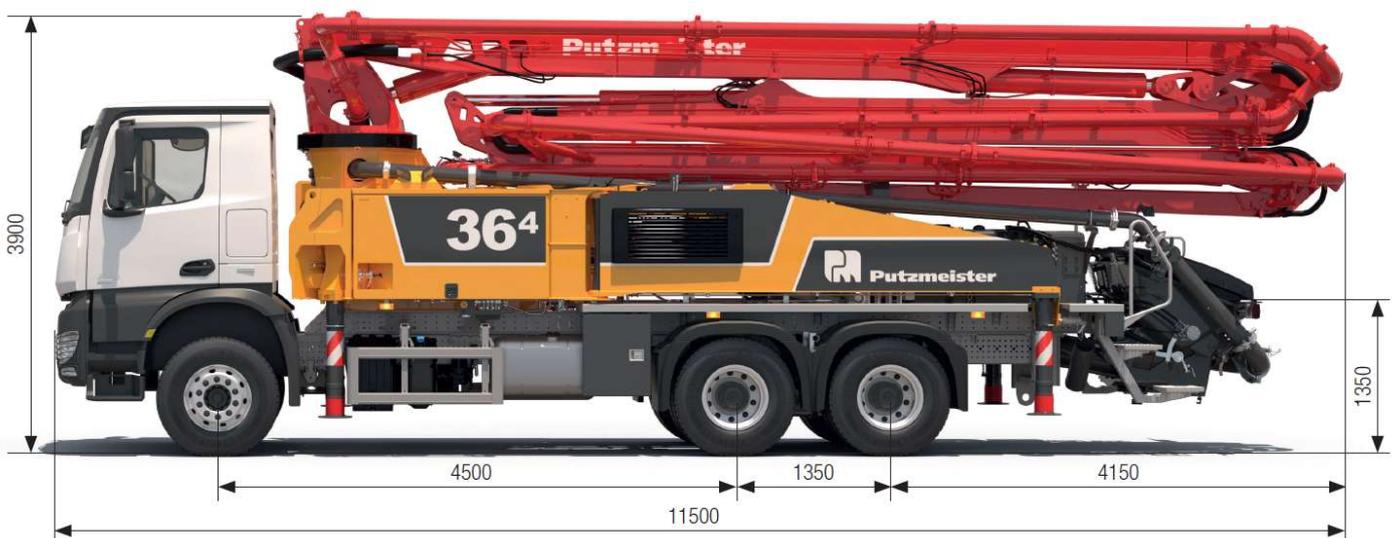

Note: All data maximum theoretical.
Dimensions and weights depend on truck, pump model and equipment
Illustrations show special equipment.

Technical data for Concrete Pump


| Model | BSF 36.10H | BSF 36.08H |
|-------------------------|---------------------------------|---------------------------------|
| Output | 95 m ³ /h | 80 m ³ /h |
| Delivery pressure | 82 bar | 70 bar |
| Delivery cylinder | 230 mm | 200 mm |
| Stroke of delivery cyl. | 1400 mm | 1400 mm |
| Strokes / minute | 27 | 30 |
| Hydraulic ratio | 4.3 | 4.9 |
| Transfer tube | S transfer tube (S 2318LS) | S transfer tube (S 2018LS) |
| Hopper | RS 909 Approx. 600L | RS 905 A Approx. 600L |
| Filling height | Approx. 1.35 m | Approx. 1.35 m |
| Control system | Free flow hydraulics (FFH - EL) | Free flow hydraulics (FFH - EL) |

- All data maximum theoretical.


Technical data for Boom

| Model | Boom M36-4 |
|-------------------|--|
| Reach height | 35.6 m |
| Horizontal reach | 31.4 m |
| Reach depth max. | 23.1 m |
| Unfolding height | 8.5 m |
| Delivery line | DN 125/ max. 85bar |
| Slewing circle | 365° |
| Number of arms | 4 |
| Folding system | Z fold |
| Hydraulic control | CBC |
| Remote control | Radio remote control wt Display |
| Support | Front : Rear : Telescoping, diagonally Swinging |


BSF 36-4 Reach information diagram, Support

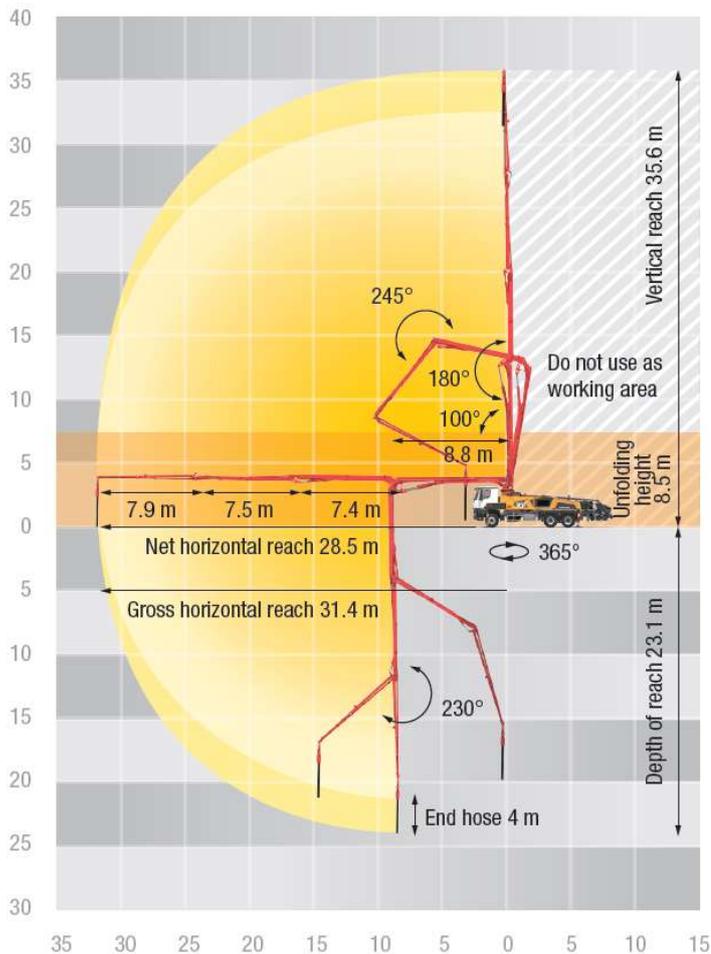

Standard

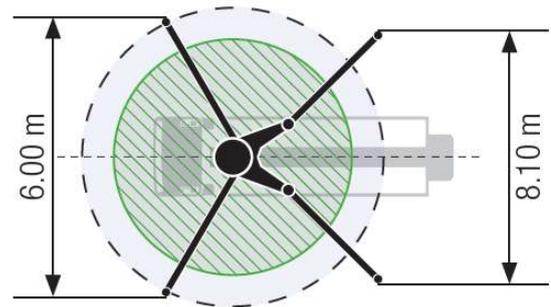

OSS

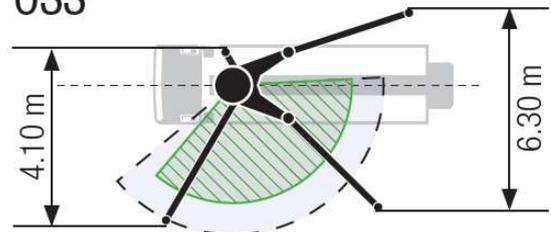

Support width based on center of support leg

Scope of supply

Agitator safety cutout (RSA) in RFID with self-start protection

Concrete hopper with agitator

Delivery cylinder chrome plated

End hose 4,0 m DN 125

Ergonic Graphic Display (EGD) with machine-failure-management

Ergonic 3 control system. (EOC 2.0) Ergonic Output Control

Flushing water pump 160 l/min 17-25 bar

Grab Rail right/left side

Hinged elbow with cleaning port

Horn via mushroom button at hopper

Operating manual (2xPaper), spare part list

Platform non-skid

Pump on/off dependent on speed

Rear Foldable steps

Radio Remote Control with display

Rubber collar at hopper

Splash guard fixed

S-transfer tube switchover normal/fast

Support Plates in holder

Tool set incl. standard equipment

Towing eye

Water tank 500 L

Working lights @ Hopper & Boom tip

Central lubrication hopper, electrically

Optional for BSF 36.10H

One Sided Support - OSS

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.