



Putzmeister

Your benefits

- Large mixer/hopper for more efficient working
- Water metering pipe in the mixer grill prevents blockages
- Lifting mixer with low filling height for convenient filling
- Conforms with CE standards, simple and clear operation
- Fully hydraulic pump and mixer drive with an infinitely variable delivery rate up to 60 l/min
- Quiet 3-cylinder 16.3 kW Kubota engine (Stage V)
- Optimal soundproofing thanks to double-walled canopy
- Optimal manoeuvrability thanks to low drawbar load
- Lasting value thanks to high resale value

SP 11 LMR Stage V – Plastering made easy



The comfortable SP 11 LMR worm pump has been specially designed to meet the needs for plastering, filling and grouting work.

The pump can effortlessly convey material over distances of 60 m and to heights of 40 m. You can use site-made mixes or prebagged interior and external plasters, monocoat, fire-proofing mortar, base coat plaster, light-weight masonry mortar, ornamental mortar as well as filling and grouting work.

Your expert Putzmeister dealer will be happy to explain the additional advantages to you and answer all your questions with regard to your individual requirements.

- **Exterior plaster** (lime, lime cement and insulating plaster)
- **Interior plaster** (lime plaster)




Plaster/
Fine plaster



The clearly laid out operating panel enables users to control the machine easily and in accordance with CE standards. The delivery rate and water metering are infinitely variable.



The extremely lightweight plastic canopy is particularly robust and optimally protected against corrosion.

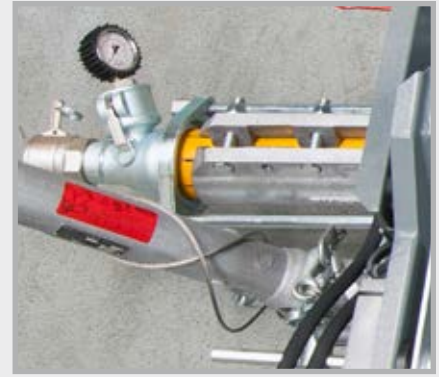

The powerful 2L6 worm pump with M 50 pressure connection is included as part of standard equipment. It can process site-made mixes with up to 6 mm grain size, depending on the desired delivery rate and the properties of the material.

Technical data

SP 11 LMR (Stage V)

Mixer drum	180 l
Feed hopper	220 l
Delivery rate*	5–60 l/min
Delivery pressure	25 bar
Delivery range**	60 m horizontal and 40 m vertical for exterior/interior plaster
Compressor	2-cylinder, 400 l/min, 3.7 bar
Pump	Worm pump 2L6
Engine	3-cylinder Kubota diesel, 16.3 kW at 2,600 rpm (Stage V)
Weight	750 kg (maximum axle load)
Length x width x height	3,260 x 1,420 x 1,160 mm
Filling height	800 mm
Maximum particle size	6 mm
Chassis	unbraked, suitable for road use

* The delivery rate is theoretical and depends on the pump pressure.

** The data is based on experience and is dependent on the materials used.

Equipment

Car cable adapter	■
Car coupling	■
Cleaning tool	■
Grease cartridge	■
High-pressure cleaner	■
Instruction manual and spare parts list	■
Lever press with hose	■
Mechanical water metering	■
Seal ring for mortar coupling	■
Standard colour paintwork	■
Standard tool	■
Cable remote control 20 m	□
Dust extraction	□
Radio remote control	□
Special canopy paint in RAL colours	□
Support wheel	□
Truck coupling	□
Vibrating screen	□
Working lights	□

□ Option ■ Standard

Putzmeister Mörtelmaschinen GmbH

Max-Eyth-Straße 10 · 72631 Aichtal / Germany
 P.O.Box 2152 · 72629 Aichtal / Germany
 Tel. +49 7127 599-0 · Fax +49 7127 599-743
 mm@putzmeister.com · www.putzmeister.com

